
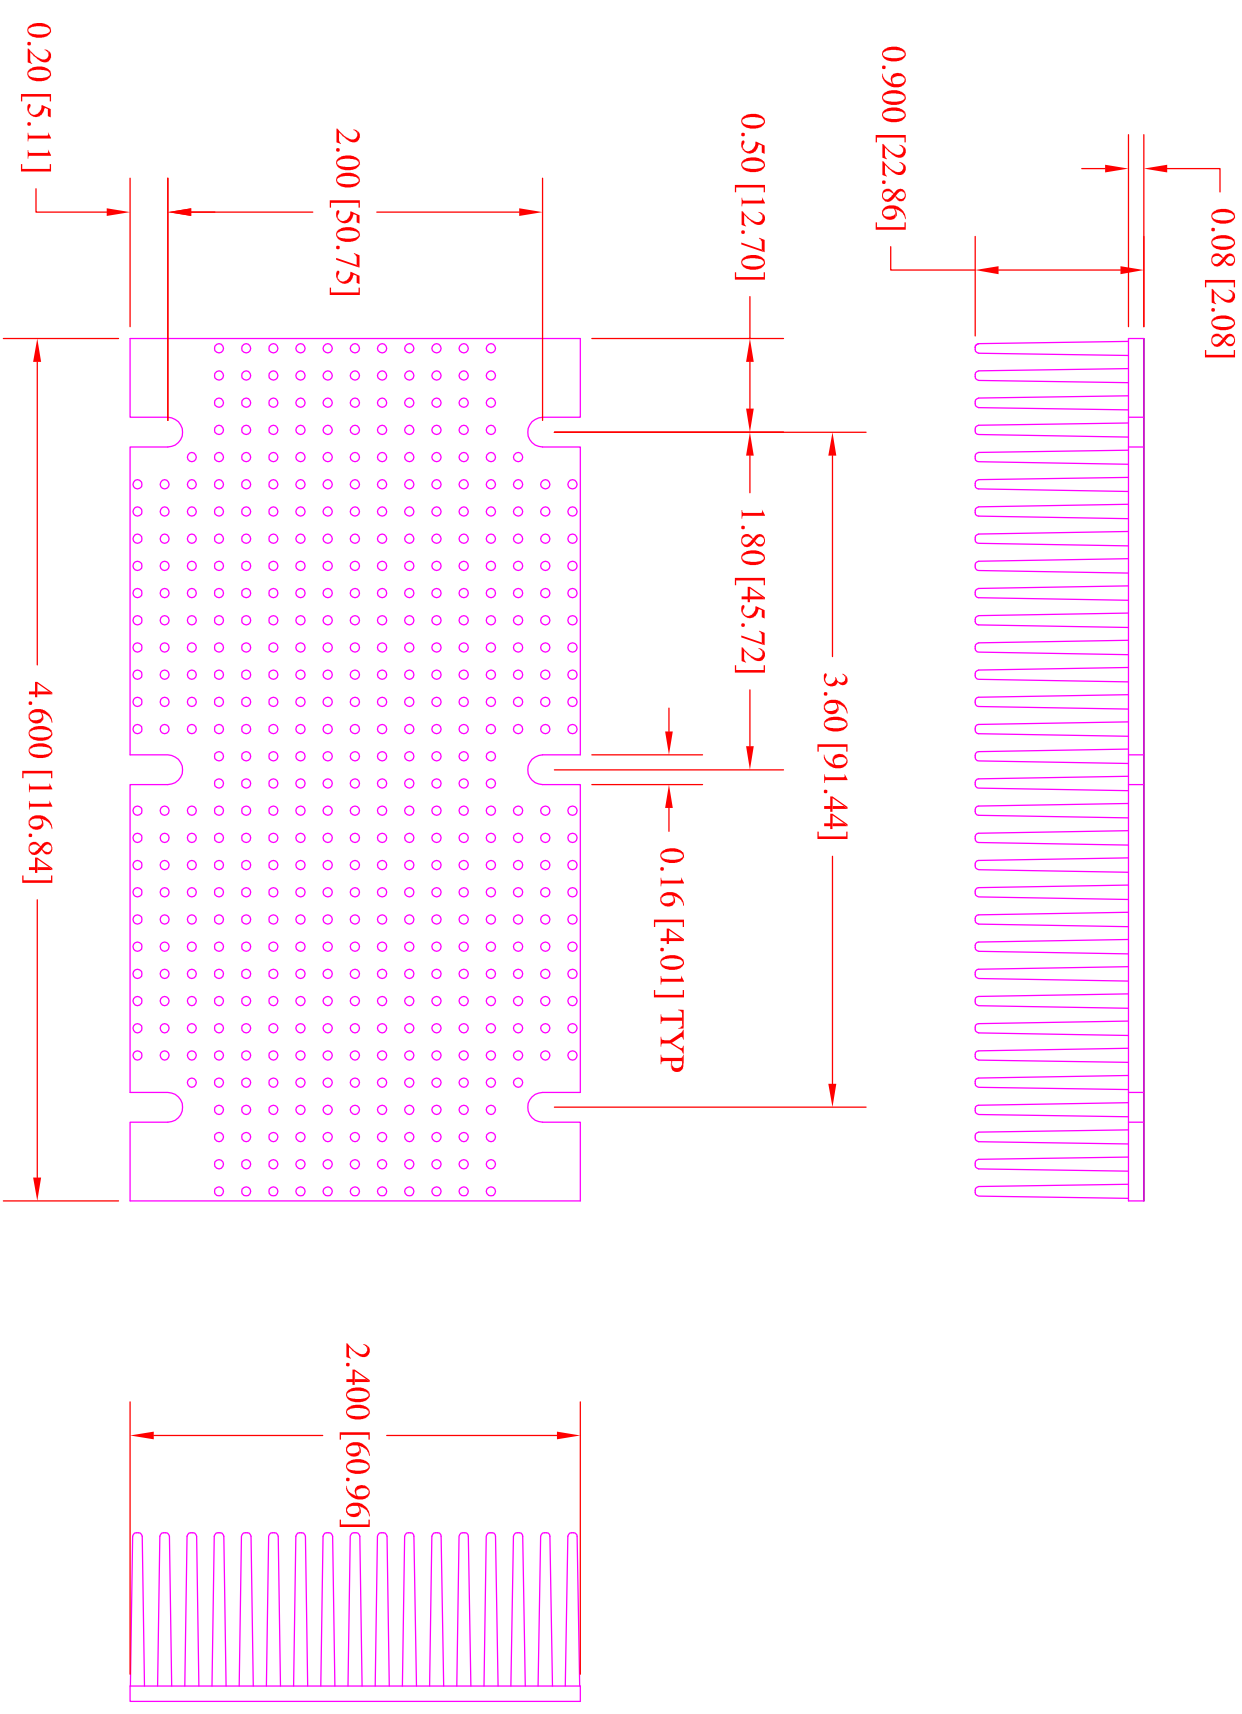


REVISIONS			
LR	DESCRIPTION	DATE	APPROVED
-	Released	7/03/14	BEE
A	Add Assembly & Thermal Info	1/20/15	BEE

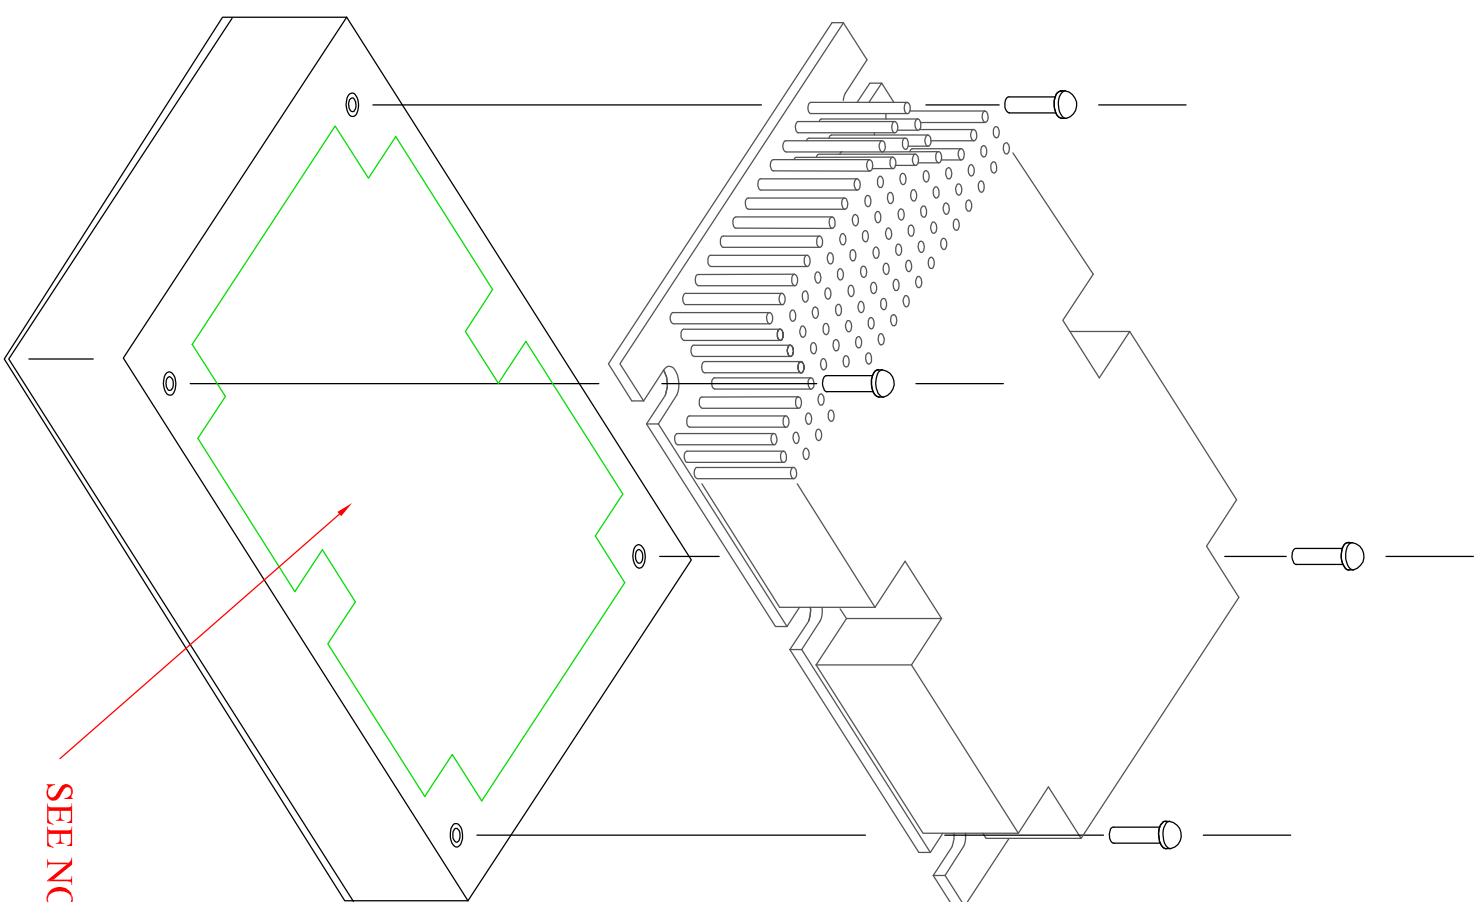

HEATSINK EFFICIENCY	
AIRFLOW (LFM)	THERMAL RESISTANCE (Theta-sa)
200	0.6 Degree C/W
400	0.4 Degree C/W
600	0.3 Degree C/W

(DATA SUPPLIED INTENDED AS REFERENCE ONLY. ACTUAL COOLING PERFORMANCE MAY VARY BY APPLICATION)

- NOTES:
1. PRIOR TO INSTALLING THE HEATSINK, APPLY A THIN LAYER (APPROX 1/64") OF THERMAL COMPOUND BETWEEN THE CASE AND HEATSINK PLATE APPROX AS SHOWN.
 2. INSTALL HEATSINK USING #4-40 X.38 PAN HEAD MACHINE SCREWS, 4 PL. TORQUE SCREWS TO A MAXIMUM OF 4.0 IN-LBS.

UNLESS OTHERWISE SPECIFIED		STANDARD	
1. DIMENSIONS IN INCHES	2. DIMENSIONS IN MILLIMETERS	DWG	DATE
FRAC -	XX -	CHK	DATE
XXX = ±.005	ANGLE =	CRG	DATE
MATERIAL		ENQ	DATE
FINISH		APPROVAL	
SCALE		ON FILE	
NA	A	DATE	DATE
SHEET 1 OF 1		TITLE	
DO NOT SCALE PRINT		American Power Design	
		E OPTION HEATSINK	
NUMBER	REV		
HS-E	A		